



epic  
window  
fashion



Motorized Curtain Track System




## Motorized Curtain Track System

### FEATURES & SPECIFICATIONS


A system designed and made for quiet and smooth operation.

With motorized curtain track system, we offer incredibly quiet and smooth operation and accurate positioning through industry-leading smart home technology to give you full control of your curtains day and night.


- ✓ Minimal design.
- ✓ Simple installation.
- ✓ Smooth and quiet operation.
- ✓ Accurate positioning.
- ✓ System load up to 50kg.
- ✓ Tracks can be bent for curved applications.
- ✓ Supplied in 6m lengths or cut to specific size.
- ✓ White as standard.

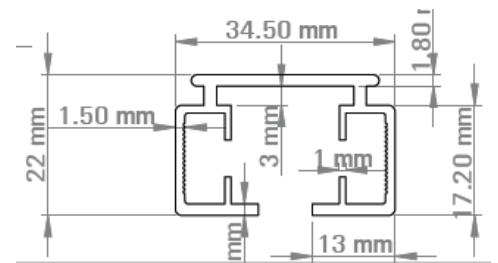

Aluminum Track

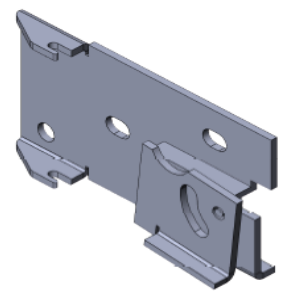


Ceiling Bracket





Drive Unit



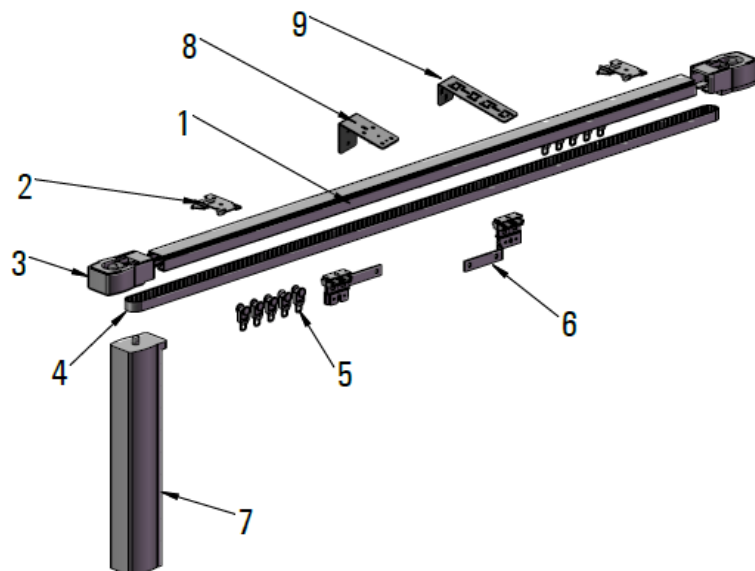

## STANDARD PARTS

- 1.Curtain Track
- 2.Ceiling Bracket
- 3.Drive Unit
- 4.Drive Belt
- 5.Runner
- 6.Master Carrier
- 7.Curtain Motor
- 8.L-Shaped Wall Bracket
- 9.Extended L-Shaped Wall Bracket

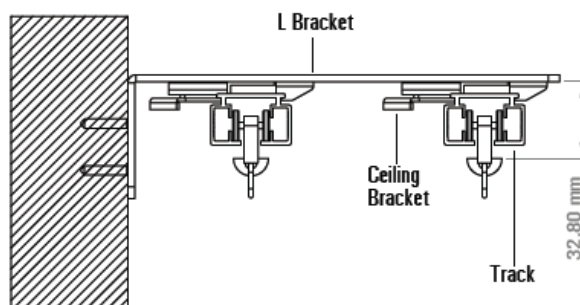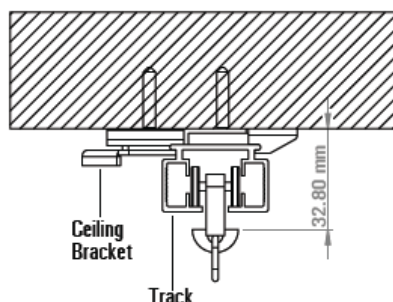

## Specification Details

**Product:** Motorized Curtain Track System

**Supplier:** Epic Window Fashion

**Web:** [www.epicwindowfashion.com](http://www.epicwindowfashion.com)

**Email:** [info@epicwindowfashion.com](mailto:info@epicwindowfashion.com)

**Tel:** +86 (0)769 8456 9578

**Benefits:** 1. Pre-cut to length or lengths for cutting at site. 2. Simple installation. 3. Quiet and smooth operation. 3. Tracks can be bent for curved applications. 4. Accurate and smart positioning. 5. Heavy-duty drapery up to 50kg.

**Size Limitations:** minimum 1000 mm to maximum 6000 mm.

**Track:** Extruded aluminum. 34.5 mm x 22 mm x 1.5 mm thick. White as standard.

**Track Finish:** Electrophoresis coating.

**Control Type:** Hand-held remote or wall mount switch.

**Motor:** DOOYA DT82TN, 1.2Nm 14cm. AC (100V~240V), Radio+ Multi-interface.

**Dry Contact Input :** Available.

**Brackets:** Coated White to suit track color. Ceiling: 62 mm x 32 mm x 1.5 mm thick in steel. L-shaped Wall Bracket: 99 mm x 60 mm x 3 mm in steel. Extended L-shaped Wall Bracket: 185 mm x 53 mm x 3 mm in steel.

**Runners:** White runners to suit track color with stainless steel ring for hanging ceiling-to-floor drapery.

**Runner Ratio:** 8 to 10 runners/m.

**Mounting Options:** Ceiling or wall mount.

**Opening:** One Way or Central Opening.

**Curtain Box Reserved:** 100 mm for single drapery. 200 mm for dual drapery.